# RECKLI® Release Work Instructions

RECKLI RELEASE is an aqueous, ready-to-use concrete release agent based on non-hazardous vegetable oil for residue-free demoulding when using RECKLI formliners. It is also suitable for use on formwork and moulds, as well as other non-absorbing substrates such as sealed wood, steel, or plastic-coated formwork. It can be used both in horizontal and vertical applications.

Clean the formwork

Maximum filling level of the spray device: 75%

Recommended pressure: 4 bar

Select the correct nozzle for the application.

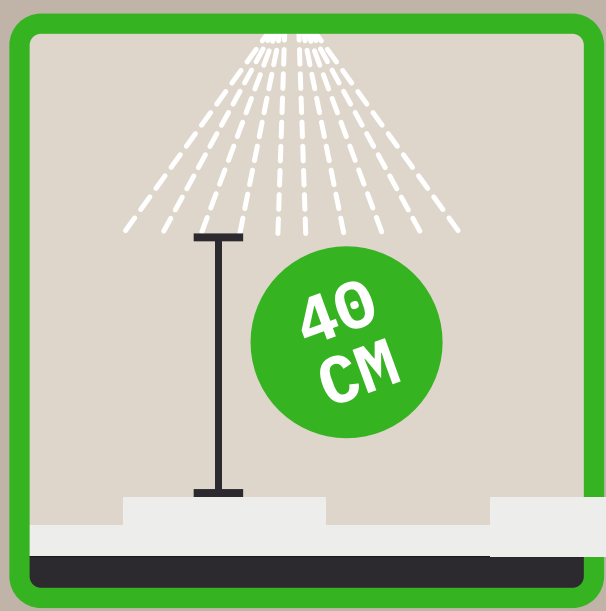


The optimum spraying distance is 40 cm.

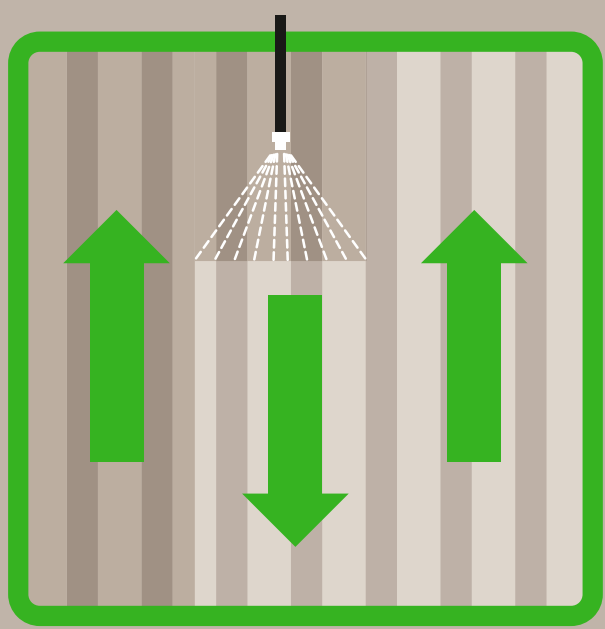

Apply RECKLI RELEASE evenly in overlapping passes.

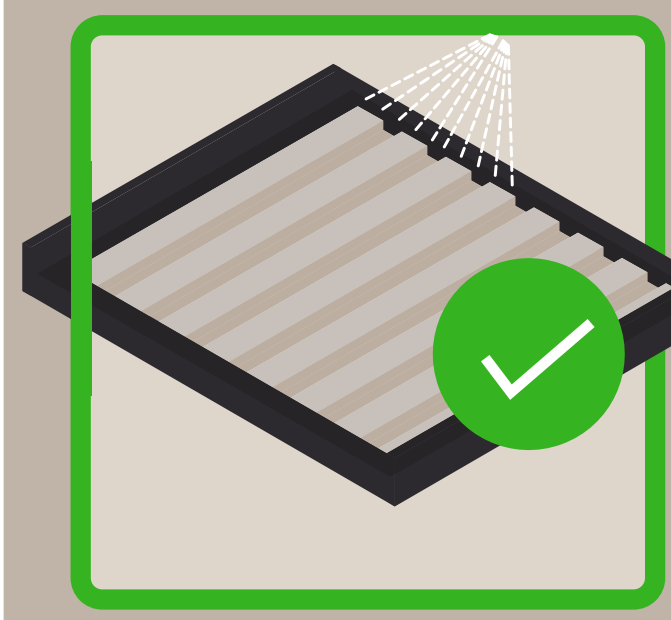

A thin and uniform coat is key to achieving a good release result.

Avoid overdosing, puddles, and runs.

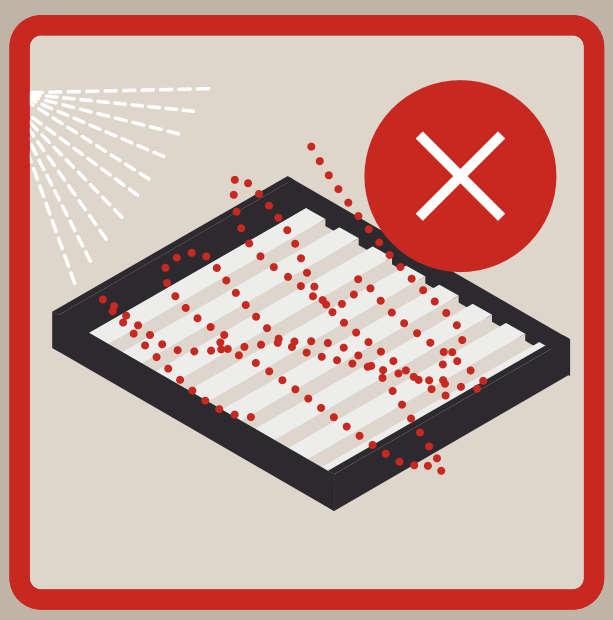

Do not apply the release agent unevenly.

+49 2323 1706-0 info@reckli.com reckli.com