

## 2/117 RIPPLE 5-FOLD

The functional formliner creates a smooth concrete surface with semi-round attachments orthogonally set in five-fold rows to each other, at a height of 2 millimeters. The concrete surface achieves a rank of resistance (to skidding) of R11.


### DIMENSIONS

Uses	Dimensions (mm)	Order Number
100	▲ 1480 × ► 7500	C 2117
50	-	-
10	-	-

Rank of resistance to skidding of the concrete surface R 11

100-timer formliners are supplied in an individual dimension within the maximum indicated dimensions.

The specified widths of the 10-timer and 50-timer formliners are a fixed dimension and ensure the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 50 cm steps.

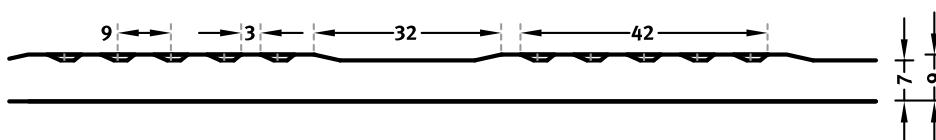

# RECKLI HEADQUARTERS

Do you have a question about our products  
and would like to get in touch? You can call us  
on the following number:

**+49 2323 1706-0**

RECKLI GmbH

Gewerkenstr. 9a

44628 Herne

Germany

Fax: +49 2323 1706-50

Mail: [info@reckli.com](mailto:info@reckli.com)

[www.reckli.com](http://www.reckli.com)