

2/117 RIPPLE 5-FOLD

The functional formliner creates a smooth concrete surface with semi-round attachments orthogonally set in five-fold rows to each other, at a height of 0.07". The concrete surface achieves a rank of resistance (to skidding) of R11.


DIMENSIONS

Uses	Dimensions (in)	Order Number
100	▲ 58.27 × ► 295.28	C 2117
10	-	

Rank of resistance to skidding of the concrete surface R 11

100-timer formliners are supplied in an individual dimension within the maximum indicated dimensions.

The specified widths of the 10-timer and 50-timer formliners are a fixed dimension and ensure the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

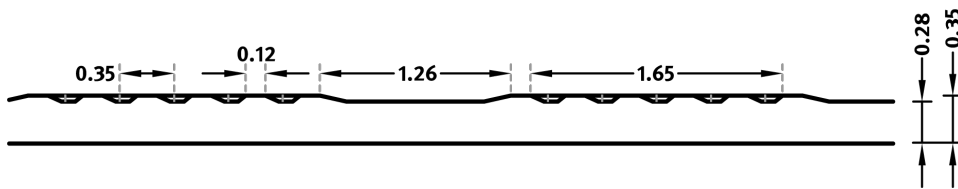

US FORMLINER HEADQUARTERS

Do you have a question about our products
and would like to get in touch? You can call us
on the following number:

706.549.6787

US Formliner Inc.

370 Commerce Blvd.

Athens GA 30606

USA

Phone: 706.549.6787

www.reckli.com/en/usa/