

2/117 RIPPLE 5-FOLD

The functional formliner creates a smooth concrete surface with semi-round attachments orthogonally set in five-fold rows to each other, at a height of 0.07". The concrete surface achieves a rank of resistance (to skidding) of R11.


DIMENSIONS

| Uses | Dimensions (in) | Order Number |
|------|--------------------|--------------|
| 100 | ▲ 58.27 × ► 295.28 | C 2117 |
| 10 | - | |

Rank of resistance to skidding of the concrete surface R 11

100-timer form liners are supplied in an individual dimension within the maximum indicated dimensions.

The specified widths of the 10-timer and 50-timer form liners are a fixed dimension and ensure the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 50 cm steps.

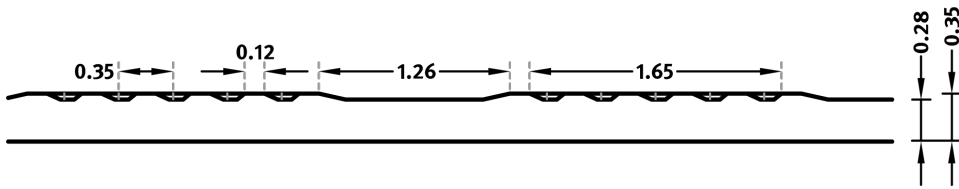

RECKLI HEADQUARTERS

Do you have a question about our products
and would like to get in touch? You can call us
on the following number:

+49 2323 1706-0

RECKLI GmbH
Gewerkenstr. 9a
44628 Herne
Germany
Fax: +49 2323 1706-50
Mail: info@reckli.com
www.reckli.com