

2/119 PIKES

The functional formliner creates a smooth concrete surface with pyramid-shaped fittings at a height of 0.08". The concrete surface achieves a rank of resistance (to skidding) of R13.


DIMENSIONS

Uses	Dimensions (in)	Order Number
100	▲ 114.17 × ► 102.36	C 2119
10	-	

Rank of resistance to skidding of the concrete surface R 13

100-timer formliners are supplied in an individual dimension within the maximum indicated dimensions.

The specified widths of the 10-timer and 50-timer formliners are a fixed dimension and ensure the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

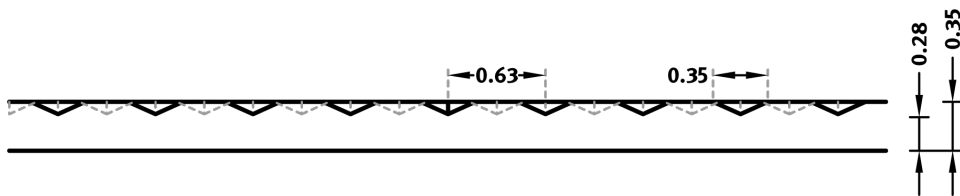

US FORMLINER HEADQUARTERS

Do you have a question about our products
and would like to get in touch? You can call us
on the following number:

706.549.6787

US Formliner Inc.

370 Commerce Blvd.

Athens GA 30606

USA

Phone: 706.549.6787

www.reckli.com/en/usa/

REFERENCES

