

2/201 Mecklenburg

The functional formliner creates a very smooth, nearly unprocessed concrete surface which is reminiscent of a slate plate. The concrete surface achieves a rank of resistance (to skidding) of R 13.


Dimensions

Series	Uses	Dimensions (mm)	Ordernumber
C	100	▲ 5900 × ► 1995	C2201

100


100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.

Rank of resistance to skidding of the concrete surface R 13

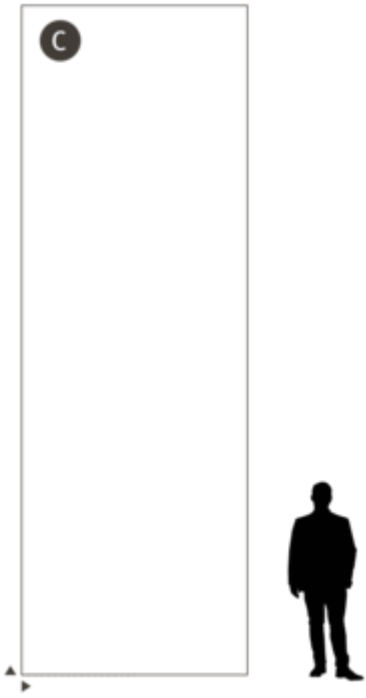


Section Drawing

The drawing illustrates the cross-section of our formliner.



Profile Continuity

No seamless profile continuity.

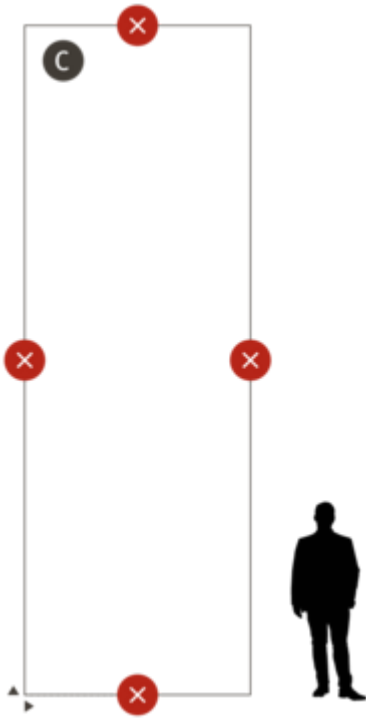

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C
WEIGHT	≈ 10 kg/m ²
DIMENSIONAL TOLERANCES	See Formliner Properties page for details

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com

+49 2323 1706-0

RECKLI GmbH

Industriestraße 36

44628 Herne

Germany