



2/22 Altmühl

A vertically running wood pattern with light grains and fine knotholes.

Dimensions

Series	Uses	Dimensions (mm)	Ordernumber
C	100	▲ 6700 × ► 3630	C2022
F	50	▲ 6000 × ► 1000	F2022


100

100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.

50


The specified width of the 50-timer formliner is a fixed dimension and ensures the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

Please note: The drawing shows the formliner, not the concrete view.

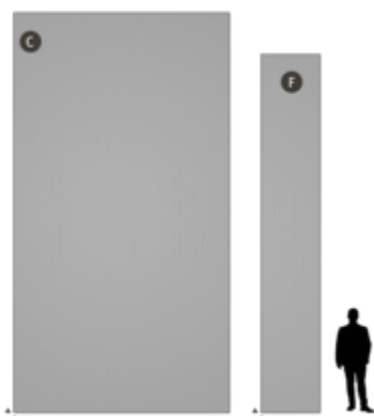

Section Drawing

The drawing illustrates the cross-section of our formliner.




Profile Continuity

Profile continuity is guaranteed at the respective maximum dimensions of the formliner.

Joint lines may occur when sections are joined. Visibility varies depending on the pattern.

Please note: The drawing shows the formliner, not the concrete view.

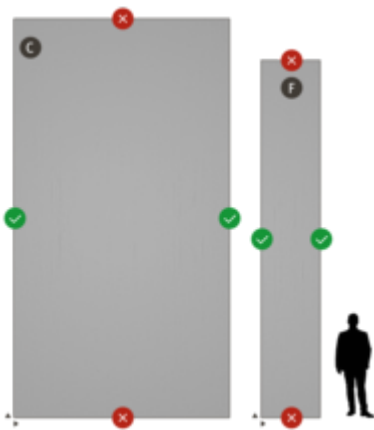

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C
WEIGHT	≈ 11 kg/m ²

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com

+49 2323 1706-0

RECKLI GmbH

Industriestraße 36

44628 Herne

Germany